



PCT

(10) International Publication Number
WO 2006/006344 A1

(43) International Publication Date
19 January 2006 (19.01.2006)

- (51) **International Patent Classification :** ⁷ **F04B 39/02**, 39/00, 39/12

(21) **International Application Number:** PCT/JP2005/011205

(22) **International Filing Date:** 14 June 2005 (14.06.2005)

(25) **Filing Language:** English

(26) **Publication Language:** English

(30) **Priority Data:** 2004-201545 8 July 2004 (08.07.2004) JP

(71) **Applicant (for all designated States except US):** MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka, 5718501 (JP).

(72) **Inventor; and**

(75) **Inventor/Applicant (for US only):** ISHIDA, Yoshinori.

(74) **Agents:** IWAHASHI, Fumio et al.; c/o Matsushita Electric Industrial Co., Ltd., 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).

(81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:
— with international search report

Published:

— *with international search report*

[Continued on next page]

(54) Title: COMPRESSOR

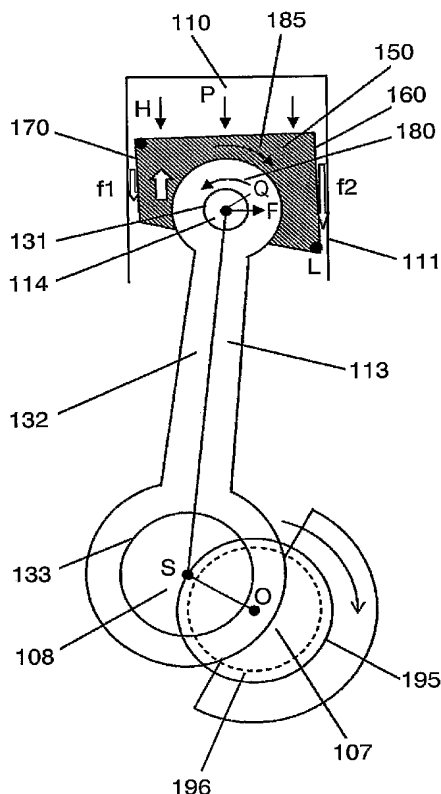

(57) Abstract: A compressor which includes a piston (150) reciprocating in a cylinder bore (111) provided in a cylinder block. Length of the circumferential surface at the compression load side (160) is made to be longer than that at the anti-compression load side (170), so that area of sliding-contact surface at the compression load side is greater than that at the anti-compression load side. The above configuration is effective to prevent occurrence of wearing due to unsymmetrical contact of piston with cylinder bore. Thus, deterioration in the refrigeration capability and instability of the performance is prevented.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.